


Product Code	ACT-050	ACT-095	ACT-150	ACT-240	ACT-300
Product Name	Universal connector 6-50 mm ²	Universal connector 6-95 mm ²	Universal connector 25-150 mm ²	Universal connector 35-240 mm ²	Universal connector 95-300 mm ²
Nominal Current (IEC)	160 A (Cu) 145 A (Al)	245 A (Cu) 220 A (Al)	320 A (Cu) 290 A (Al)	425 A (Cu) 380 A (Al)	490 A (Cu) 420 A (Al)
Nominal Voltage (IEC)	690 V	690 V	690 V	690 V	690 V
Number of Pole	1 pcs	1 pcs	1 pcs	1 pcs	1 pcs
Max. Cross Section	50 mm ²	95 mm ²	150 mm ²	240 mm ²	300 mm ²
Tightening torque	3,5 Nm (6-10 mm ²) 12 Nm (16-50 mm ²)	12 Nm (6-35 mm ²) 22 Nm (50-95 mm ²)	14 Nm (25-50 mm ²) 30 Nm (70-150 mm ²)	26 Nm (35-120 mm ²) 40 Nm (150-240 mm ²)	33 Nm (95-185 mm ²) 60 Nm (240-300 mm ²)
Weight	10 gr	26 gr	58 gr	97 gr	141 gr
Max. Operating Temp.	80 °C	80 °C	80 °C	80 °C	80 °C
Mounting	Aluminium Screw M10	Aluminium Screw M14	Aluminium Screw M16	Aluminium Screw M20	Aluminium Screw M20
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Surface	Tin Plated	Tin Plated	Tin Plated	Tin Plated	Tin Plated
Standarts	EN 61238	EN 61238	EN 61238	EN 61238	EN 61238

Pcs / Package	50	30	20	10	10
Weight / Package	0,6 kg	0,8 kg	1,2 kg	1 kg	1,45 kg
L x W x H (mm)	175 x 100 x 75	175 x 100 x 75	175 x 100 x 75	175 x 100 x 75	175 x 100 x 75



	A	B	C	D	E	F	G
Act-050	21,5	35	14	21	8,5	10	4
Act-095	30	46	20	26	10,5	13	5,4
Act-150	38,9	62	26	35	12,5	15	6,4
Act-240	44	63	32	35	12,5	16	8,3
Act-300	48	64	40	36	12,5	18	10,4

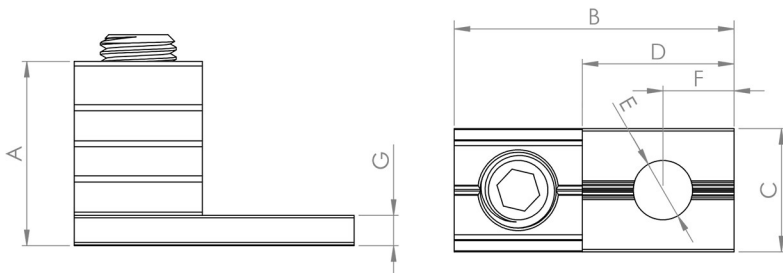

Koral Ltd Sti
Guzeller OSB Galvano Koop 2/20
Gebze / Kocaeli / Turkey
Phone : +90 262 502 02 64
Fax : +90 262 502 02 76
E-mail : koral@koral.com.tr